




CLIPPER[®]

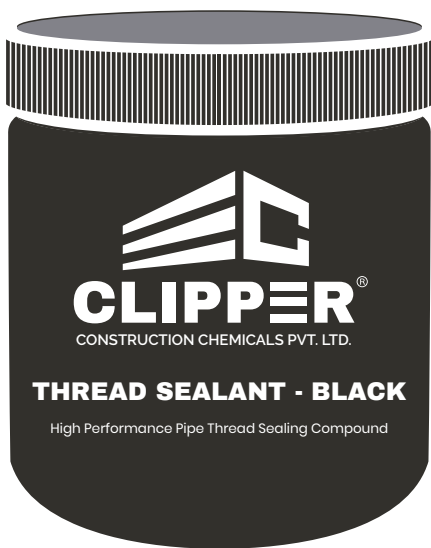

- 8+**
BENEFITS
- High Performance
 - Quick Setting
 - Non-Hardening
 - Non-Toxic
 - Non-Hazardous
 - Flexible
 - Easy To Apply
 - Easy To Disassemble

THREAD SEALANT - BLACK

High Performance Pipe Thread Sealing Compound

PLUMBING SOLUTIONS

Areas of Application

Clipper Thread Sealant - Black is a high performance pipe joint & gasket sealing compound for use on metal & plastic pipes under varying conditions. It is a quick setting, tough yet flexible sealant ideal for sealing jobs in plumbing, air conditioning, automotive & other industrial applications.

- **Plastics Pipes Including PVC • Industrial Applications**
- **Metals like Aluminum, Black Iron, Brass, Copper, Stainless Steel**

Benefits

- High Performance
- Quick Setting
- Non-Hardening
- Non-Toxic
- Non-Hazardous
- Flexible
- Easy to Apply
- Easy to Disassemble

Colour

Black

Additional Info

- Joints can be disassembled easily, without damage to pipe or equipment.
- It can be removed from skin, clothing, tools or equipment with isopropyl alcohol.

Technical Specifications

Appearance	Black Paste
Specific Gravity	1.5 +/- 0.10
Brookfield Viscosity	> 30k cP @ 23°C +/- 1°C)
Pressure Rating	Upto 400 psi (30 kg/cm ²)

Pack Size

50 g, 100 g, 200 g & 500 g

Shelf Life

1 year from the date of manufacturing.

Clipper Construction Chemicals Pvt. Ltd.

(An ISO 9001:2015 Certified Company)

200/2, Bhawrasla, Sanwer Road, Indore,
Madhya Pradesh - 453555 INDIA

 **62 62 055 055**

Email: info@clipperchemicals.com

Website: www.clipperchemicals.com

 /ClipperChemicals

 /ClipperChemicals

 /ClipperChemical

 /company/Clipper-Chemicals

 /ClipperChemicals



Health and Safety - We strongly recommend to follow all safety guidelines applicable under all construction settings. We suggest the usage of gloves and goggles. Any splashes to skin or eyes should be washed off immediately with clean water. If irritation persists, take advice from a qualified healthcare professional immediately.

Disclaimer - All the information mentioned on this product information sheet is to be considered as a general guideline. The actual usage and results may vary from condition to condition. We advise undertaking a trial in user-specific conditions before full-scale usage. We do not commit any express or implied guarantee/warranty for the results. The company is not liable for any consequential loss or damage.